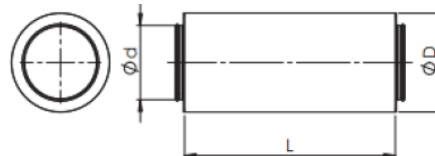


Silencer SRS 50mm

**Product description**

Round silencer with 50 mm sound absorption. Sound absorption material is mineral wool. The perforated inner tube and outer shell are manufactured of galvanized steel. Between the inner tube and the insulation, there is fabric to prevent wool particles from entering the duct system. Equipped with rubber gaskets.

| Type | Ød nom | l [mm] | ØD [mm] | Attenuation [dB] - Mid-frequency [Hz] | | | | | | | | m [kg] |
|------------|-----------|-----------|------------|---------------------------------------|-----|-----|-----|------|------|------|------|-----------|
| | | | | 63 | 125 | 250 | 500 | 1000 | 2000 | 4000 | 8000 | |
| SRS80-0.3 | 80 | 300 | 180 | 2 | 5 | 9 | 14 | 24 | 25 | 20 | 16 | 1,5 |
| SRS80-0.6 | 80 | 600 | 180 | 2 | 7 | 12 | 26 | 50 | 50 | 46 | 23 | 2,3 |
| SRS80-0.9 | 80 | 900 | 180 | 3 | 11 | 22 | 41 | 48 | 49 | 48 | 34 | 3,9 |
| SRS80-1.2 | 80 | 1200 | 180 | 4 | 13 | 27 | 49 | 50 | 51 | 49 | 41 | 5,5 |
| SRS100-0.3 | 100 | 300 | 200 | 2 | 5 | 8 | 13 | 22 | 24 | 19 | 12 | 1,7 |
| SRS100-0.6 | 100 | 600 | 200 | 2 | 6 | 11 | 25 | 43 | 48 | 35 | 21 | 2,6 |
| SRS100-0.9 | 100 | 900 | 200 | 3 | 10 | 19 | 36 | 46 | 48 | 46 | 31 | 4,6 |
| SRS100-1.2 | 100 | 1200 | 200 | 3 | 12 | 24 | 46 | 49 | 49 | 48 | 37 | 6,3 |
| SRS125-0.3 | 125 | 300 | 225 | 1 | 4 | 7 | 13 | 21 | 22 | 17 | 11 | 2,7 |
| SRS125-0.6 | 125 | 600 | 225 | 2 | 5 | 10 | 23 | 41 | 41 | 28 | 17 | 3,8 |
| SRS125-0.9 | 125 | 900 | 225 | 2 | 8 | 16 | 32 | 45 | 47 | 36 | 21 | 5,6 |
| SRS125-1.2 | 125 | 1200 | 225 | 2 | 7 | 19 | 41 | 49 | 48 | 46 | 24 | 6,9 |
| SRS160-0.3 | 160 | 300 | 260 | 0 | 3 | 5 | 12 | 20 | 18 | 11 | 8 | 2,9 |
| SRS160-0.6 | 160 | 600 | 260 | 1 | 4 | 8 | 20 | 34 | 32 | 19 | 13 | 4,1 |
| SRS160-0.9 | 160 | 900 | 260 | 1 | 6 | 14 | 27 | 44 | 35 | 24 | 16 | 6,4 |
| SRS160-1.2 | 160 | 1200 | 260 | 2 | 6 | 16 | 35 | 48 | 45 | 30 | 19 | 7,9 |
| SRS200-0.3 | 200 | 300 | 300 | 0 | 2 | 4 | 10 | 19 | 14 | 10 | 7 | 4,1 |
| SRS200-0.6 | 200 | 600 | 300 | 1 | 3 | 8 | 17 | 27 | 24 | 14 | 10 | 5,6 |
| SRS200-0.9 | 200 | 900 | 300 | 2 | 4 | 13 | 23 | 37 | 28 | 19 | 14 | 7,5 |
| SRS200-1.2 | 200 | 1200 | 300 | 2 | 5 | 15 | 29 | 45 | 41 | 23 | 15 | 9,7 |
| SRS250-0.6 | 250 | 600 | 350 | 1 | 2 | 7 | 15 | 23 | 19 | 9 | 7 | 6,3 |
| SRS250-0.9 | 250 | 900 | 350 | 1 | 3 | 11 | 20 | 35 | 24 | 12 | 11 | 9,1 |
| SRS250-1.2 | 250 | 1200 | 350 | 2 | 4 | 13 | 26 | 42 | 31 | 14 | 13 | 11,5 |
| SRS315-0.6 | 315 | 600 | 415 | 0 | 2 | 6 | 12 | 19 | 13 | 8 | 7 | 7,3 |
| SRS315-0.9 | 315 | 900 | 415 | 1 | 3 | 9 | 16 | 28 | 15 | 11 | 10 | 10,3 |
| SRS315-1.2 | 315 | 1200 | 415 | 1 | 3 | 10 | 20 | 33 | 19 | 13 | 11 | 14,2 |
| SRS400-0.6 | 400 | 600 | 500 | 0 | 1 | 3 | 7 | 15 | 9 | 7 | 6 | 9,6 |
| SRS400-0.9 | 400 | 900 | 500 | 0 | 2 | 7 | 10 | 15 | 10 | 9 | 9 | 12,9 |
| SRS400-1.2 | 400 | 1200 | 500 | 0 | 2 | 6 | 12 | 24 | 14 | 13 | 10 | 16,9 |
| SRS500-0.6 | 500 | 600 | 600 | 0 | 1 | 3 | 7 | 10 | 10 | 8 | 3 | 12,4 |
| SRS500-0.9 | 500 | 900 | 600 | 0 | 1 | 4 | 10 | 11 | 11 | 10 | 4 | 16,5 |
| SRS500-1.2 | 500 | 1200 | 600 | 0 | 1 | 5 | 11 | 12 | 12 | 11 | 5 | 19,9 |