


Kit, supply valve with sound insulation, metal SMK2

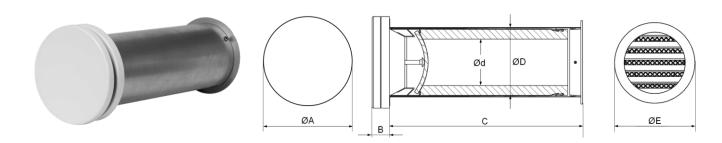

Description

Kit, supply valve with sound insulation, metal SMK2 provides a natural air intake to indoor. Kit is equipped with diffuser with low noise level and new sleek design.

Construction Diffuser made from polymer coated steel, white colour (RAL9016), adjustable air flow control, body has

a gasket, made of cellular plastic

Washable filter

Telescopic air duct, made from galvanized steel, equipped with EPDM rubber gasket

Sound insulation layer from polyurethane foam

External ventilation grille made from aluminium alloy and equipped with metal insect screen 2x2mm


Installation Through-wall mounting, glue and screw fixing


Dimensions


Туре	ØΑ	В	С	ØD	Ød	ØE
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
SMK2-80dB	107	25	300-550	83	49	96
SMK2-100dB	135	25	300-550	103	69	125
SMK2-125dB	160	25	300-550	128	94	150



Pressure drop










1 – with sound insulation layer;

2 – without sound insulation layer.

Sound reduction

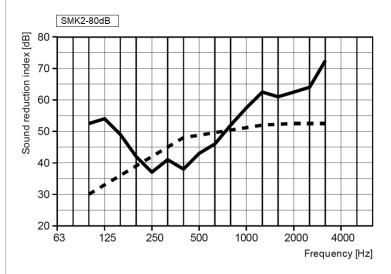

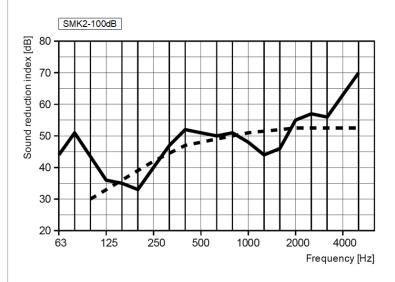

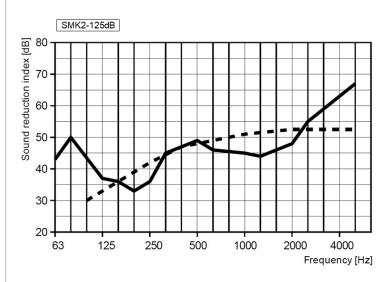

Diagrams shows sound reduction with fully opened diffuser and 300mm wall. Calculating on 10m².