


Square wall low pressure duct fan ZSMK

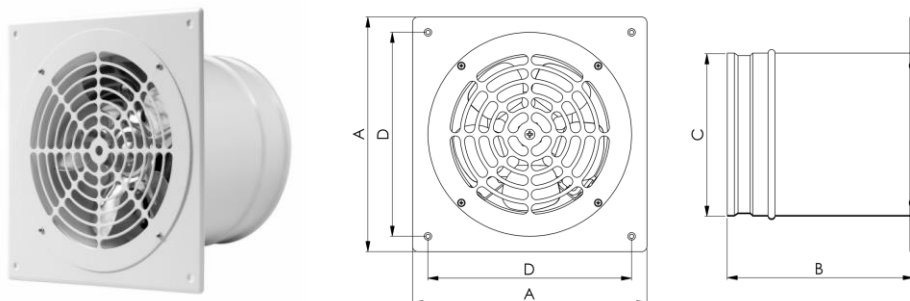

Description

Industrial low pressure exhaust fan is widely used for indoor ventilation – commercial, office and industry premises. Compatible with 160, 200, 250 and 315 mm round air ducts

Technical data

Construction	Made of galvanized steel or other metals Motor equipped with sleeve bearing and thermal self resetting protection Impeller made of aluminium
Installation	Installing positions multiple Fixation to the wall using screws
Location	Indoor
Colors	White
Speed control	All types of ZSMK are speed controllable

Technical specifications

Type	ZSMK160	ZSMK200	ZSMK250	ZSMK315
Voltage [V]	220 - 240			
Frequency [Hz]	50			
Power [W]	21	29	70	110
Max. air flow [m ³ /h]	183	340	800	1325
Noise level at 3m [dB(A)]	43	47	48	55
Protection against environmental factor	IPX4			
RPM [min ⁻¹]	1300	1300	1300	1300
Temperature min/max [°C]	0/+40			

Compliant to the ErP regulation (EC) 327/2011, the power consumption at optimum efficiency is < 125W

Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]	m [kg]
ZSMK160	230	180	160	200	1,86
ZSMK200	270	180	200	240	2,42
ZSMK250	320	180	250	290	3,30
ZSMK315	385	180	315	355	4,43

Technical specifications

