


## PVC Flex air ducts FV

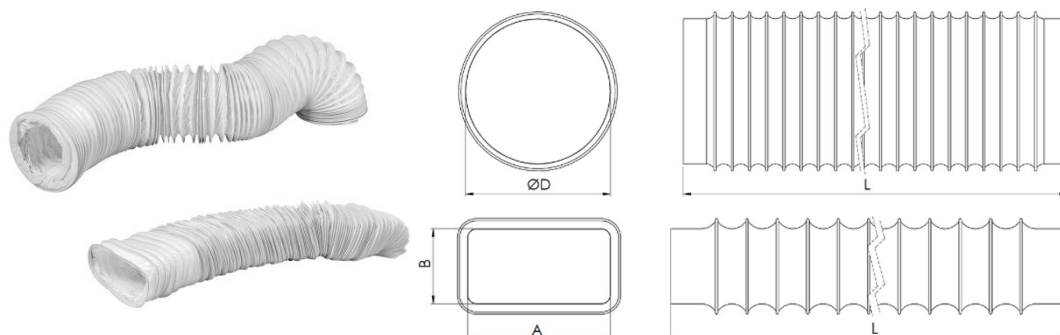

### Description

Flexible air duct PVC Flex for heating, cooling, ventilation and air conditioning systems under low and medium pressure

### Technical data

Construction	Made from PVC sheets with steel wire frame
Temperature range	-20°C to +70°C
Max air speed	20 m/sec
Maximum pressure	2000 Pa
Min. bend radius	0,6 Ø
Colors	White

### Dimensions

Type	ØD [mm]	A [mm]	B [mm]	L [m]	m [kg]
FV80-1	80	-	-	1	0,07
FV80-3	80	-	-	3	0,18
FV80-6	80	-	-	6	0,37
FV100-1	100	-	-	1	0,08
FV100-3	100	-	-	3	0,22
FV100-6	100	-	-	6	0,45
FV125-1	125	-	-	1	0,09
FV125-3	125	-	-	3	0,27
FV125-6	125	-	-	6	0,50
FV150-1	150	-	-	1	0,13
FV150-3	150	-	-	3	0,33
FV150-6	150	-	-	6	0,66
FV160-1	160	-	-	1	0,13
FV160-3	160	-	-	3	0,38
FV160-6	160	-	-	6	0,72

Type	ØD [mm]	A [mm]	B [mm]	L [m]	m [kg]
FV15-1	-	110	55	1	0,13
FV15-3	-	110	55	3	0,37
FV15-6	-	110	55	6	0,74
FV25-1	-	220	55	1	0,24
FV25-3	-	220	55	3	0,67
FV25-6	-	220	55	6	1,31
FV29-1	-	220	90	1	0,19
FV29-3	-	220	90	3	0,60
FV29-6	-	220	90	6	1,07