


Aluminum air ducts G

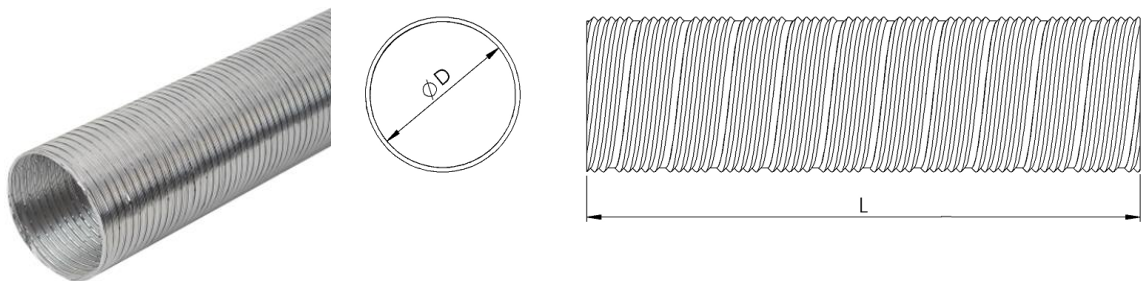

Description

Semi-flexible aluminum air ducts for use in air conditioning systems, steam extraction and other ventilation purposes. The air ducts are available in various colors, sizes and lengths.

Technical data

Construction	Made of corrugated aluminum, temperature range up to +200 (°C) Maximum pressure (Pa): 2000 Maximum air flow rate (m/s): 25 Available air duct length [m]: 1; 1.5; 2; 2.5; 3; 5
Assembly	Installation using special tapes and clamps
Colors	Metallic, white, anthracite

Dimensions

Type	ØD [mm]	L [mm]	m [kg]
G80-1.5	80	1500	0,13
G80	80	3000	0,26
G100-1.5	100	1500	0,17
G100	100	3000	0,34
G120-1.5	120	1500	0,21
G120	120	3000	0,42
G125-1.5	125	1500	0,21
G125	125	3000	0,42
G130-1.5	130	1500	0,20
G130	130	3000	0,40
G150-1.5	150	1500	0,24
G150	150	3000	0,48
G160-1.5	160	1500	0,25
G160	160	3000	0,50
G200	200	3000	0,65
G250	250	3000	0,75
G315	315	3000	1,05

Modifications

- Gxxx – metallic
- GxxxB – white
- GxxxA – anthracite