
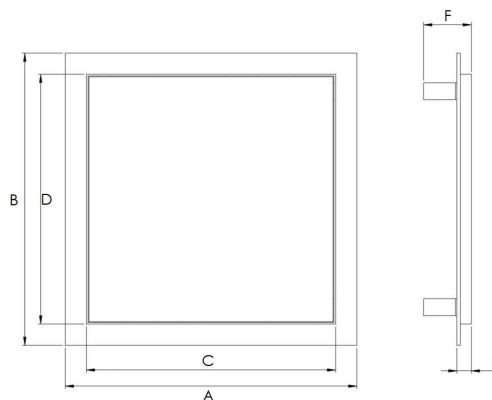


## Aluminium inspection door RLR

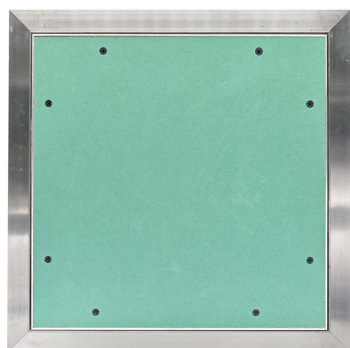

### Description

Aluminium profile drywall access panels with push-to-open mechanisms and safety cable. Designed for installation in walls and ceilings. The panels provide convenient access to concealed building services and utility systems. After installation, the panel remains virtually almost invisible and can be painted or finished together with the surrounding surface. They are characterized by easy installation, clean appearance, and the ability to be opened repeatedly without damaging the finish.

### Technical data

Construction	Manufactured from aluminium profile with plasterboard insert Equipped with push latch mechanism Equipped with safety cable for ceiling installation * Easily removable access door *
Installation	Screw or adhesive fixing in any position Installation from the inner side of the wall
Colors	Metallic

### Dimensions

Type	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	m [kg]
RLR1515	195	195	145	145	17	56,5	0,69
RLR2020	245	245	195	195	17	56,5	0,90
RLR2020-25 *	255	255	205	205	28	54	1,20
RLR3020	345	245	295	195	17	56,5	1,15
RLR3030	345	345	295	295	17	56,5	1,48
RLR3030-25 *	355	355	305	305	28	54	2,30
RLR4040	445	445	395	395	17	56,5	2,16
RLR4040-25 *	455	455	405	405	28	54	3,80
RLR4060	445	645	395	595	17	56,5	3,01
RLR5050	545	545	495	495	17	56,5	3,07
RLR5050-25 *	555	555	505	505	28	54	5,60
RLR6060	645	645	595	595	17	56,5	4,16
RLR6060-25 *	655	655	605	605	28	54	7,80

Inspection hatches are available in other sizes upon special order

\* double-layer plasterboard hatches with non-removable door panel